
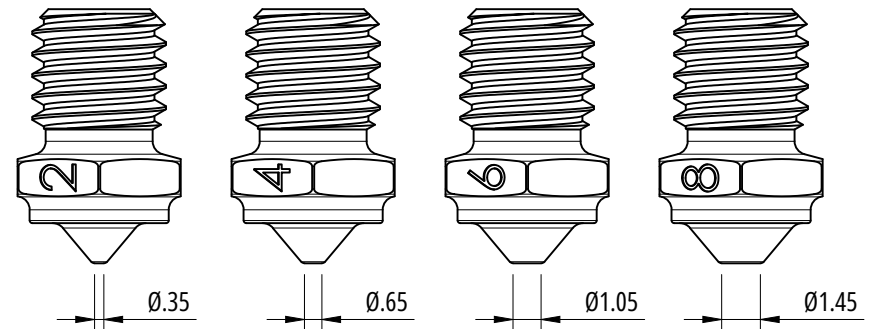
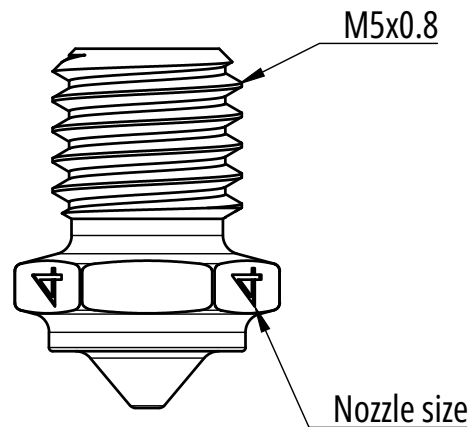
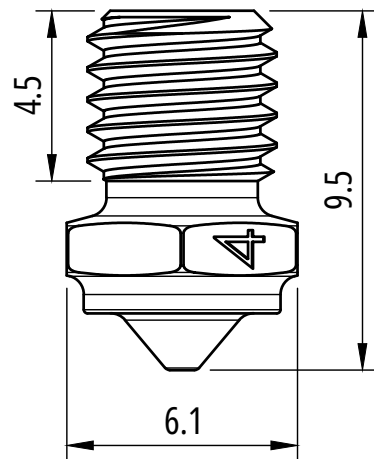


# #nozzles

600-C-CHT-FIN

SKU

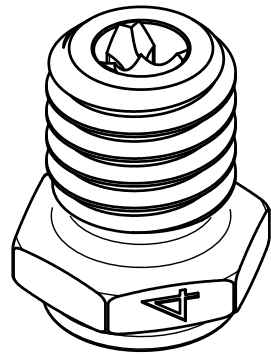

## Specifications

|                     |   |
|---------------------|---|
| Available Sizes     | 0.20, 0.40, 0.60, 0.80                                  |
| Thread              | M5x0.8 Thread Length: 4.5mm                             |
| Hex Size            | 6mm   |
| Total Length        | 9.5mm   |
| Working Temperature | Up to 450°C   |
| Areas Of Use        | PLA, ABS, HIPS, PC, TPU, TPE, NYLON, PETG, PP, PVA, ASA |
| Tightening Torque   | 1.5 Nm  |

## Compatibility and notes

Slice Engineering Mako Hotend

Minimum recommended temperature for changing nozzle: 270°C

Aim to hot-tighten nozzle with hotend temperature at least 10°C above intended printing temperature, or up to 300°C.

Hot-loosen with no more than 2 Nm of torque, at the same temperature.



|      |                                   |
|------|-----------------------------------|
| NAME | Coated Nozzle M5×0.8×4.5×9.5×1.75 |
| TYPE | Nozzles                           |
| SKU  | 600-C-CHT-FIN                     |